


Firing installation Wood working and processing

Reese Kehlleisten GmbH
D-32657 Lemgo

**Underfeed firing plant
Type NRF 902 ND
in low pressure steam execution
for residues from wood working
and processing (chipper shavings)
Boiler output: 835 kW**

Double cyclone
separator
DZE 1200

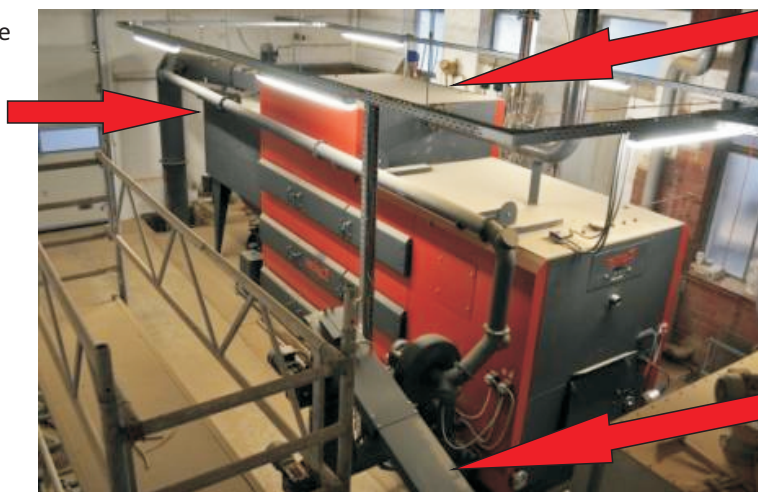

steam dome

fuel feeding

The steam generator is a compact 4 pass steel boiler for the generation of low pressure steam in the range of 835 kW. The boiler is dimensioned for the operation of 0,5 bar overpressure. By means of the vertical heating surfaces of the 4 pass technique an optimum use of the combustion energy is realized.



The electric control (here incl. visualization, displaying and manipulation via touch panel) is situated in a stable, dust-proof switch cabinet and includes all switch elements for the automatic operation of the installation. The execution of the control corresponds to the guidelines of the VDE.

Nolting products
distinguish themselves
by satisfied customers

